




EMARAT MARITIME (LLC)

P. O. BOX 25859, DUBAI, United Arab Emirates, TEL: 3599955, FAX: 3599966, Email: mail@emaratmaritime.com

M.V. "DUBAI LEGEND"

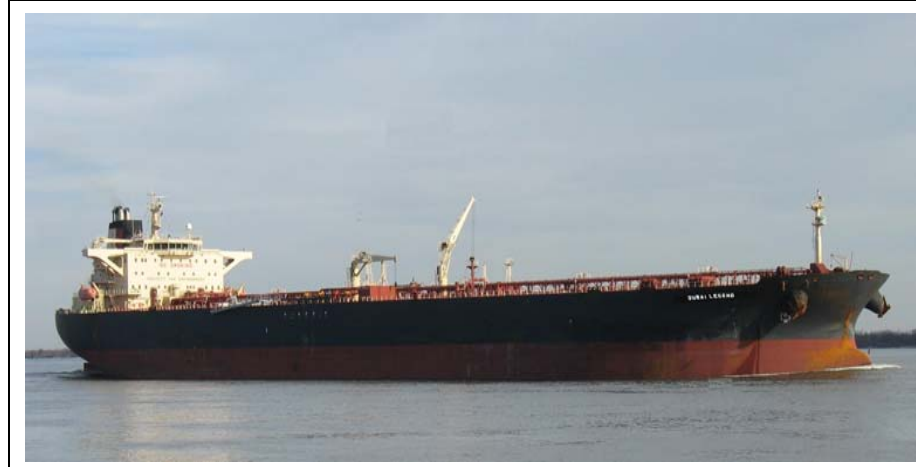

GENERAL PARTICULARS

TYPE	FLAG	BUILT	CALL SIGN	IMO NO.	LOA
CRUDE OIL TANKER(DH)	BAHAMAS	FEB 2002	C6SJ2	9231212	249.97 M

BEAM	LBP	MLD. DEPTH	S. DWT	S. DRAFT	TPC	FWA
44 M	239 M	21 M	112661 T	14.618 M	98.04 MT @ SDWT	333 MM @ SDWT

GRT	NRT	CARGO CAPACITY(98%) INCLUDING SLOPS	CARGO CAPACITY(98%) EXCLUDING SLOPS	SUEZ NT
62247	33887	126735 M ³	123785.4 M ³	63304.69 T

AIR DRAFT	CONSTANT	INMARSAT - C	INMARSAT - B	INMARSAT - B
48.185 M	200 MT	TLX - 431135710	TEL - 331135710/11	FAX - 331135712

PLACE OF BUILT	BUILDERS	CLASS	P & I CLUB
SOUTH KOREA	SAMHO HEAVY INDUSTRIES	LR	N.O.E

CARGO TANK CAPACITIES(98%)-CUB M		CRANES
1P+1S	17076.6	MID SHIP CRANE 2 X 15T ; (5.55M. OUTREACH)
2P+2S	21519	
3P+3S	21545	
4P+4S	21545	
5P+5S	21545	PROVISION CRANE 1X 4T, 1 X 2T (4.75M OUTREACH)
6P+6S	20554.8	
SL(P)+SL(S)	2949.6	
Total	126735	

ENGINE DTLS/SPEED/CONS

ENGINE TYPE	HYUNDAI B & W 7S60 MC	RPM - 105		BHP - 19460	
SPEED BALLAST - 15 K		SPEED LADEN - 14.5 K		PROP IMMERSION - 7.718M	
MAIN ENGINE - (380 CST)		AVERAGE CONS.		AUXILIARY ENGINE - (380 CST)	
55 MT / Day		LADEN		3 MT / Day (included in M/E consumption	
54 MT / Day		BALLAST		3 MT / Day (included in M/E consumption	
Loding - 10 MT / Day		AT PORT		Discharge - 56 MT / Day	
-		PORT IDLE		1.5 MT / Day	

CAPACITIES

FUEL OIL	DIESEL/GAS OIL	FRESH WATER	BALLAST WATER (SBT)
3433.0 MT	263.3 MT	379.80 MT	42451.8MT

OWNERS / MANAGERS

OWNERS FULL STYLE	MANAGERS
LEGEND MARITIME INC.	EMARAT MARITIME LLC
NO. 2, TRUST HOUSE,	MEZZANINE FLOOR
112, BONADIE STREET,	SHARAF BUILDING, MINA ROAD
KINGSTOWN,	P.O.BOX 25859, DUBAI, U.A.E
ST.VINCENT & THE GRENADINES	TEL: 3599955, FAX: 3599966
	EMAIL: mail@emaratmaritime.com

*All details about and without guarantee.



MOORINGS

ANCHORS	2 X 1A 14 type; 10300 kg	ANCHOR CHAIN	13 port & 13 stbd @ 90 mm
WINDLASS	2 X nom 38.5 T; max 57.8 T @ 9 m/min	WINDLASS BRAKE	354 kgf / cm ²
MOORING WINCH	6 X 20 T @ 15 m /min	WINCH BRAKE	63.8T
SBM STOPPERS	2 X 200T SWL TONGUE type	MOORING TALLS	16 X 138T
MOORING WIRES	12 X 34mm; 4 X 35 mm SWL 80T	MOORING ROPES	6 X 80mm; SWL 110T

CARGO AND BALLAST SYSTEMS

CARGO PUMPS	3 X 3000 m ³ /hr @ 130m	BALLAST PUMP	1 X 3000 cum/hr & 1 X 1500 cum/hr
CARGO EDUCTORS	1 X 500 m ³ /hr	BALLAST EDUCTOR	1 X 400 m ³ /hr
STRIPPING PUMP	1X 300 m ³ /hr @ 130m	BALLAST CAPACITY	42.451.8 MT (100%)
CARGO CAPACITY	797136 Bbls = 98%	IFO CAPACITY	3433 m ³ (95%) 3398 MT
NUMBER OF GRADES	3 grades with double valve segregation	MDO CAPACITY	263.6 m ³ (95%)
MAX LOADING RATE	70000 Bbls /hr	FRESH WATER CAP	379.8 MT
CLOSED LOADING SYSTEM	Yes	IGS / COW / COT VENTING SYSTEM	
MAX DISCH RATE	56608 Bbls /hr	IGS SUPPLY	Flue gas
CARGO HEATING	Yes	FIXED COW SYSTEM	Yes
ALL TANKS COILED	Yes	FIXED TANK GUAGING SYSTEM	Yes
HEATING AGENT	Steam	P/V BREAKER FITTED	Yes
CARGO TEMP RAISED IN 24 HRS	FROM 58 DEG C TO 62 DEG C	VAPOUR EMISSION CONTROL	Yes
MAX LDG TEMP	168 deg F	TYPE OF VENTING SYSTEM	Common

MANIFOLD ARRANGEMENT

MANIFOLD	3 X 20 inch X 16 inch steel in each side	BRIDGE STERN	41.35M
BOW MANIFOLD	124.22 m	BRIDGE MANIFOLD	84.40M
MANIFOLD-TALL	4.60 m	STERN MANIFOLD	125.75M
MANIFOLD DECK	2.10 m	MANIFOLD TRAY	0.90M
MANIFOLD KEEL	22.1m	CENTRE-CENTRE	2.50M

LOADLINE INFORMATION

	DRAFT	FREEBOARD	DISPL	DWT
	METERS	METERS	TONNES	TONNES
LIGHTSHIP	2.305	18.551	18400	
TROPICAL(FW)	15.225	5.780	134016	115616
FRESH	14.951	6.084	131081	112681
TROPICAL	14.922	6.113	134071	115671
SUMMER	14.618	6.417	131061	112661
WINTER	14.314	6.721	128053	109653
DOES VSL HAVE MSDWT	Yes			

MANOUVERING INFORMATION

MANOUVERING:	RPM	SPEED
FULL	87	12.90 kts
HALF	70	10.38 kts
SLOW	53	7.66 kts
DEAD SLOW	33	4.59 kts

SBT SWAD 98%	Fwd 6.50m	Aft 8.00m
---------------------	-----------	-----------